

Features:

- 650V Schottky Diode
- Zero Reverse Recovery Current
- High Frequency Operation
- Positive Temperature Coefficient
- Temperature independent

Switching



Benefits:

- Unipolar Rectifier
- Minimal switching loss
- Higher Efficiency
- Low cooling requirement

Symbol	Value	Unit
V_{RRM}	650	V
I_F ($T_C = 145^\circ\text{C}$)	15	A
Q_C	32	nC

Applications:

- Switch Mode Power Supply
- Booster diodes in PFC, DC/DC
- AC/DC converters

Outline

TO-220-2L
Circuit

Maximum Ratings

Symbol	Parameter	Value	Unit	Test Conditions
V_R	DC Peak Reverse Voltage	650	V	$T_J = 25^\circ\text{C}$
V_{RRM}	Repetitive Peak Reverse	650	V	$T_J = 25^\circ\text{C}$
V_{RSM}	Surge Peak Reverse Voltage	650	V	$T_J = 25^\circ\text{C}$
I_F	Continuous Forward Current	42	A	$T_C = 25^\circ\text{C}$
		19		$T_C = 135^\circ\text{C}$
		15		$T_C = 145^\circ\text{C}$
I_{FRM}	Repetitive Peak Forward Surge Current	88	A	$T_C = 25^\circ\text{C}, T_p = 10\text{ms}, \text{Half Sine Wave}$
		79		$T_C = 125^\circ\text{C}, T_p = 10\text{ms}, \text{Half Sine Wave}$
I_{FSM}	Non-Repetitive Peak Forward Surge Current	119	A	$T_C = 25^\circ\text{C}, T_p = 10\text{ms}, \text{Half Sine Wave}$
		107		$T_C = 125^\circ\text{C}, T_p = 10\text{ms}, \text{Half Sine Wave}$
P_D	Power Dissipation	150	W	$T_C = 25^\circ\text{C}$
		50		$T_C = 125^\circ\text{C}$
$T_{J,max}$	Operating Junction Temperature	175	$^\circ\text{C}$	
T_{stg}	Storage Temperature Range	-55 to 175	$^\circ\text{C}$	

Thermal characteristics

Symbol	Parameter	Min.	Typ.	Max.	Unit
R_{thJC}	Thermal resistance		1.0		$^{\circ}\text{C}/\text{W}$

Electrical Characteristics

Symbol	Parameter	Value			Unit	Test Conditions
		Min.	Typ.	Max.		
V_{DC}	DC Blocking Voltage	650			V	$I_R = 100\mu\text{A}$, $T_J = 25^{\circ}\text{C}$
V_F	Forward Voltage		1.55 1.9	1.8 2.2	V	$I_F = 15\text{A}$, $T_J = 25^{\circ}\text{C}$ $I_F = 15\text{A}$, $T_J = 175^{\circ}\text{C}$
I_R	Reverse Current		5 10	100 250	μA	$V_R = 650\text{V}$, $T_J = 25^{\circ}\text{C}$ $V_R = 650\text{V}$, $T_J = 175^{\circ}\text{C}$
Q_C	Total Capacitive Charge		32		nC	$I_F = 15\text{A}$, $dI/dt = 350\text{A}/\mu\text{s}$ $T_J = 25^{\circ}\text{C}$, $V_R = 400\text{V}$
C	Total Capacitance		702 94 93		pF	$V_R = 1\text{V}$, $T_J = 25^{\circ}\text{C}$, $f = 1\text{MHz}$ $V_R = 200\text{V}$, $T_J = 25^{\circ}\text{C}$, $f = 1\text{MHz}$ $V_R = 400\text{V}$, $T_J = 25^{\circ}\text{C}$, $f = 1\text{MHz}$

Typical Performance

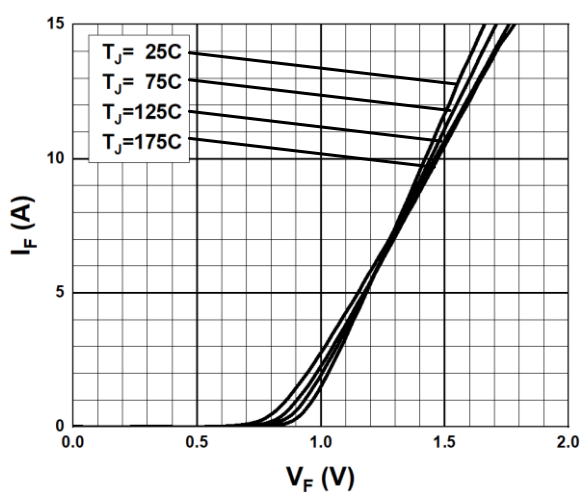


Fig. 1 Forward Characteristics

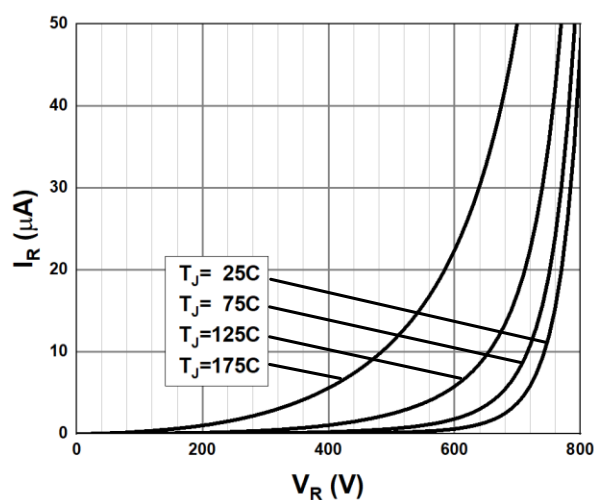


Fig. 2 Reverse Characteristics

Typical Performance

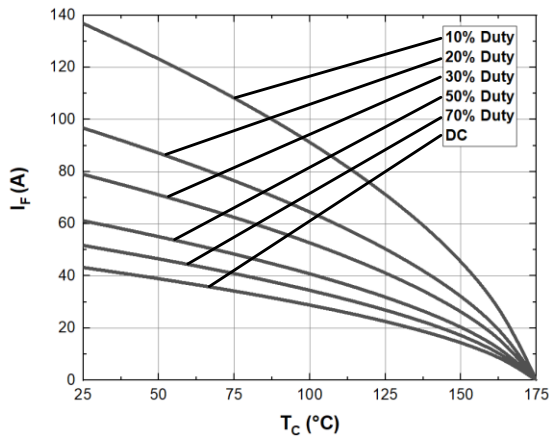


Fig. 3 Current Derating

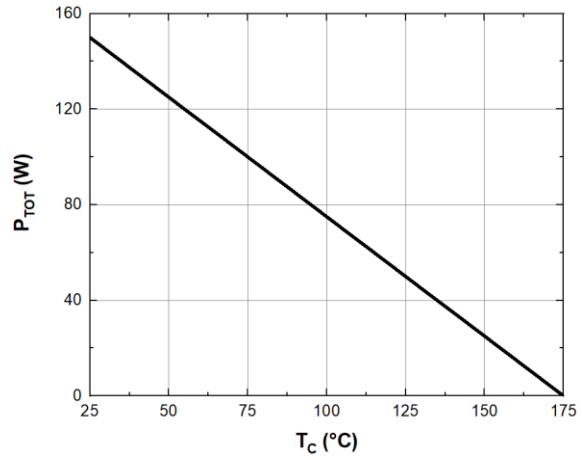


Fig. 4 Power Derating

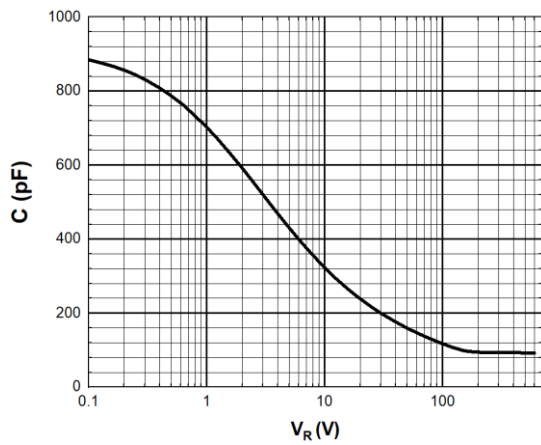


Fig. 5 Capacitance vs. Reverse Voltage

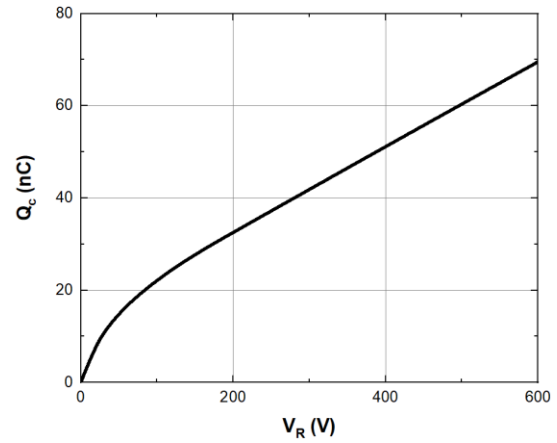


Fig. 6 Recovery Charge vs. Reverse Voltage


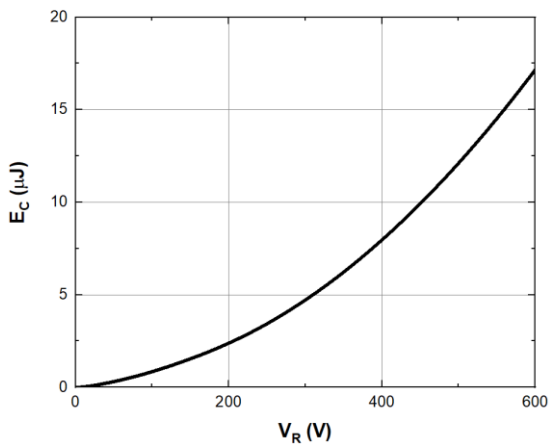


Fig. 7 Capacitance stored Energy

Package TO-220-2L (Unit: mm)

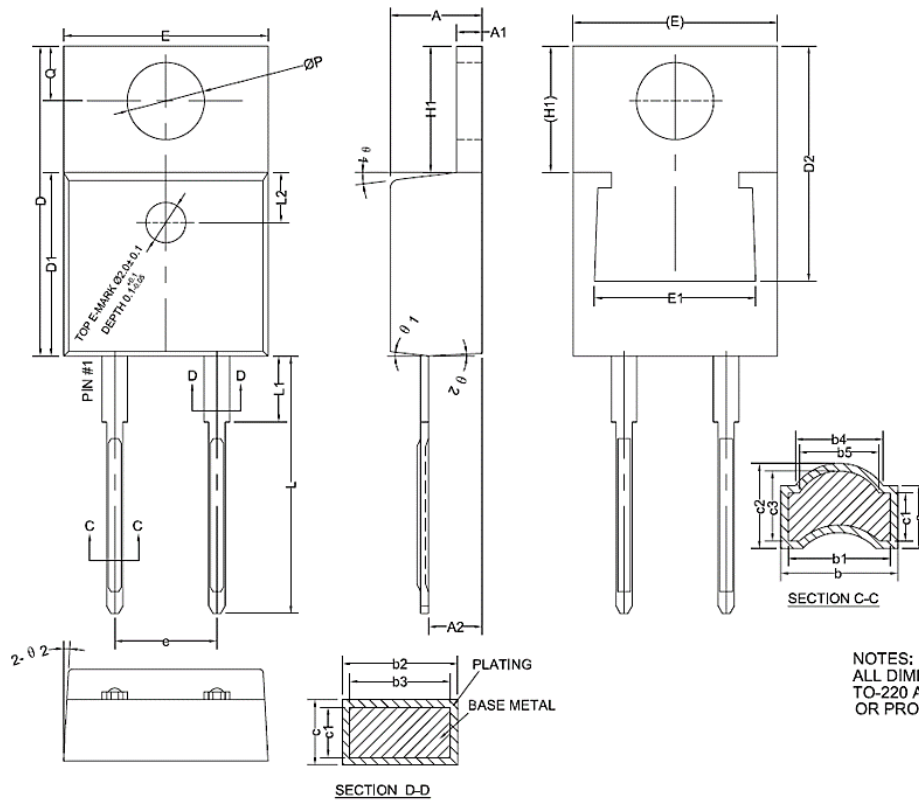

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	4.40	4.57	4.70
A1	1.25	-	1.34
A2	2.59	2.69	2.79
b	0.77	-	0.89
b1	0.76	0.81	0.86
b2	1.23	-	1.36
b3	1.22	1.27	1.32
b4	0.67REF		
b5	0.64REF		
c	0.36	-	0.45
c1	0.35	0.38	0.41
c2	0.59REF		
c3	0.56REF		
D	15.15	15.45	15.75
D1	9.05	9.15	9.25
D2	12.20	-	13.00
E	9.96	10.16	10.29
E1	7.60	-	8.20
e	4.98	5.08	5.18
H1	6.10	6.30	6.48
L	12.70	-	13.12
L1	2.80	-	3.30
L2	2.50REF		
$\varnothing P$	3.80	3.84	3.88
Q	2.60	-	2.90
θ 1	5°	7°	9°
θ 2	1°	3°	5°

NOTES:
ALL DIMENSIONS REFER TO JEDEC STANDARD TO-220 AB DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.



RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC(RoHS2), as implemented January 2nd, 2013.

REACH Compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact an AZ Power representative to ensure you get the most up-to-date REACH SVHC declaration. REACH banned substance information (Reach Article 67) is also available upon request.

This Product has not been designed or tested for use in, and is not intended for use in, applications implanted into the human body nor in applications in which failure of the product could lead to death, personal injury or property damage, including but not limited to equipment used in the operation of nuclear facilities, life-support machines, systems, or air-traffic control systems.

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, AZ Power Inc. disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.



5601 W SLAUSON AVE 190
CULVER CITY, CA 90230
WWW.AZPE.COM

Information in this document may change without notice. All referenced product or service names and trademarks are the property of their respective owners. Copyright © 2020 AZ Power Inc. All rights reserved.