

**Features:**

- 650V Schottky Diode
- Zero Reverse Recovery Current
- High Frequency Operation
- Positive Temperature Coefficient
- Temperature independent

Switching

**Benefits:**


- Unipolar Rectifier
- Minimal switching loss
- Higher Efficiency
- Low cooling requirement

| Symbol                              | Value | Unit |
|-------------------------------------|-------|------|
| $V_{RRM}$                           | 650   | V    |
| $I_F$ ( $T_C = 140^\circ\text{C}$ ) | 30    | A    |
| $*Q_C$                              | 29    | nC   |

**Applications:**

- Switch Mode Power Supply
- Booster diodes in PFC, DC/DC
- AC/DC converters

**Outline**

**TO-247-3**
**Circuit**

**Maximum Ratings (\*Per leg)**



| Symbol      | Parameter                                 | Value                        | Unit             | Test Conditions   |
|-------------|---|------------------------------|------------------|---|
| $V_R$       | DC Peak Reverse Voltage                   | 650                          | V                | $T_J = 25^\circ\text{C}$  |
| $V_{RRM}$   | Repetitive Peak Reverse                   | 650                          | V                | $T_J = 25^\circ\text{C}$  |
| $V_{RSM}$   | Surge Peak Reverse Voltage                | 650                          | V                | $T_J = 25^\circ\text{C}$  |
| $I_F$       | Continuous Forward Current                | *38/76<br>*16.5/33<br>*15/30 | A                | $T_C = 25^\circ\text{C}$<br>$T_C = 135^\circ\text{C}$<br>$T_C = 140^\circ\text{C}$  |
| $I_{FRM}$   | Repetitive Peak Forward Surge Current     | *88<br>*79                   | A                | $T_C = 25^\circ\text{C}$ , $T_p = 10\text{ms}$ , Half Sine Wave<br>$T_C = 125^\circ\text{C}$ , $T_p = 10\text{ms}$ , Half Sine Wave |
| $I_{FSM}$   | Non-Repetitive Peak Forward Surge Current | *119<br>*107                 | A                | $T_C = 25^\circ\text{C}$ , $T_p = 10\text{ms}$ , Half Sine Wave<br>$T_C = 125^\circ\text{C}$ , $T_p = 10\text{ms}$ , Half Sine Wave |
| $P_D$       | Power Dissipation                         | *115<br>*37                  | W                | $T_C = 25^\circ\text{C}$<br>$T_C = 125^\circ\text{C}$   |
| $T_{J,max}$ | Operating Junction Temperature            | 175                          | $^\circ\text{C}$ |   |
| $T_{stg}$   | Storage Temperature Range                 | -55 to 175                   | $^\circ\text{C}$ |   |

**Thermal characteristics (\*Per leg)**


| Symbol     | Parameter          | Min. | Typ.      | Max. | Unit |
|------------|--------------------|------|-----------|------|------|
| $R_{thJC}$ | Thermal resistance |      | *1.3/0.65 |      | °C/W |

**Electrical Characteristics (Per leg)**


| Symbol   | Parameter               | Value |                 |            | Unit    | Test Conditions   |
|----------|-------------------------|-------|-----------------|------------|---------|---|
|          |                         | Min.  | Typ.            | Max.       |         |   |
| $V_{DC}$ | DC Blocking Voltage     | 650   |                 |            | V       | $I_R = 100\mu A, T_J = 25^\circ C$  |
| $V_F$    | Forward Voltage         |       | 1.5<br>1.9      | 1.8<br>2.2 | V       | $I_F = 15A, T_J = 25^\circ C$<br>$I_F = 15A, T_J = 175^\circ C$   |
| $I_R$    | Reverse Current         |       | 5<br>10         | 100<br>250 | $\mu A$ | $V_R = 650V, T_J = 25^\circ C$<br>$V_R = 650V, T_J = 175^\circ C$   |
| $Q_C$    | Total Capacitive Charge |       | 29              |            | nC      | $I_F = 15A, dI/dt = 350A/\mu s$<br>$T_J = 25^\circ C, V_R = 400V$   |
| $C$      | Total Capacitance       |       | 677<br>99<br>97 |            | pF      | $V_R = 1V, T_J = 25^\circ C, f = 1 MHz$<br>$V_R = 200V, T_J = 25^\circ C, f = 1 MHz$<br>$V_R = 400V, T_J = 25^\circ C, f = 1 MHz$ |

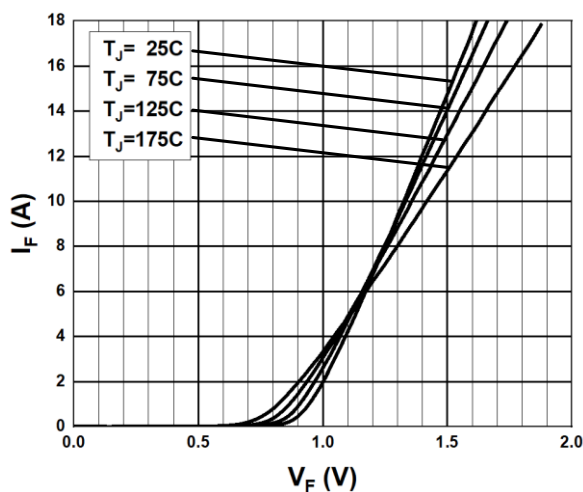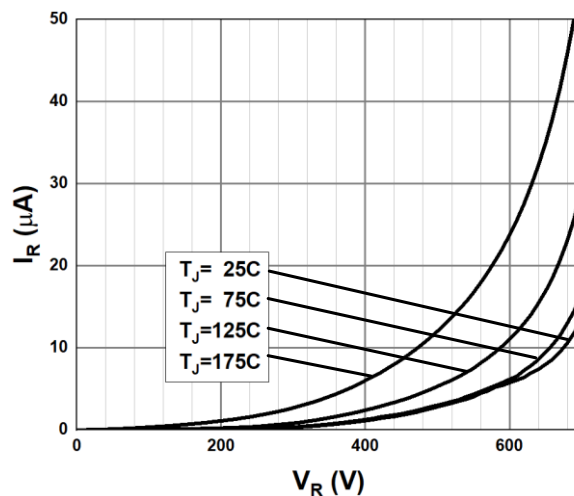**Typical Performance (Per leg)**

**Fig. 1 Forward Characteristics**

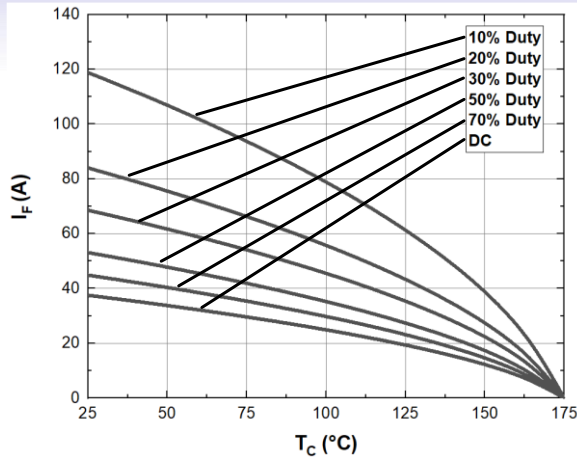**Fig. 2 Reverse Characteristics**


**Typical Performance (per leg)**

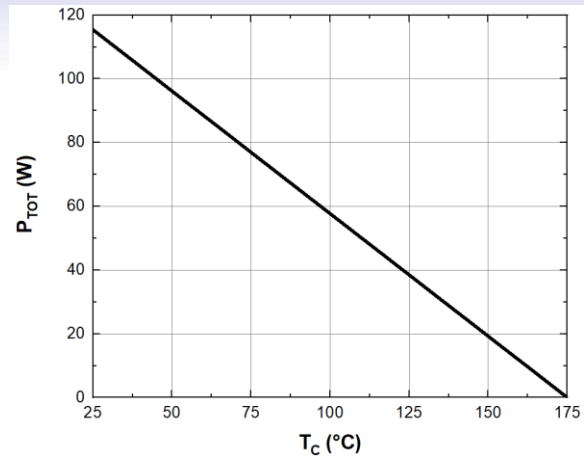


**Fig. 3 Current Derating**




**Fig. 4 Power Derating**

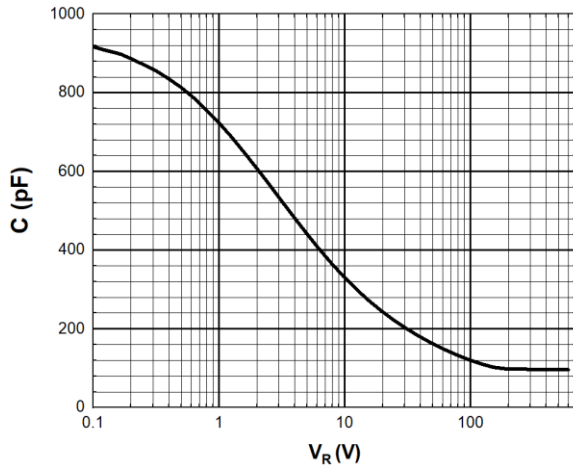

**Fig. 5 Capacitance vs. Reverse Voltage**

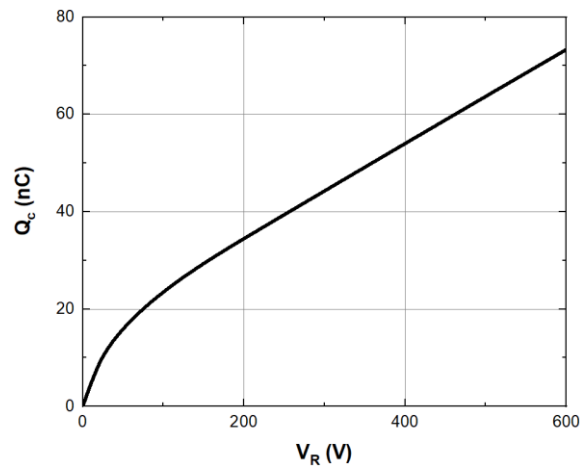


**Fig. 6 Recovery Charge vs. Reverse Voltage**

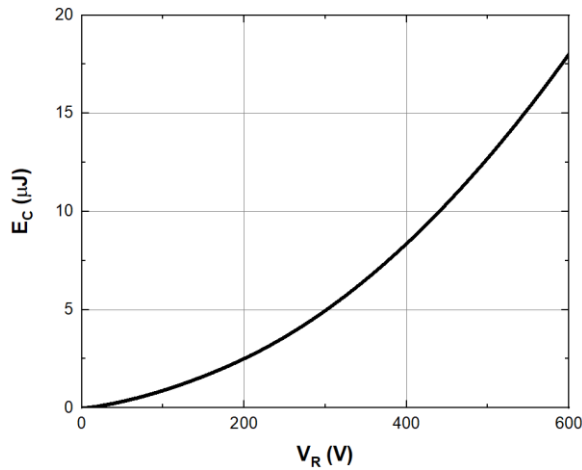


**Fig. 7 Capacitance stored Energy**

**Typical Performance (per leg)**

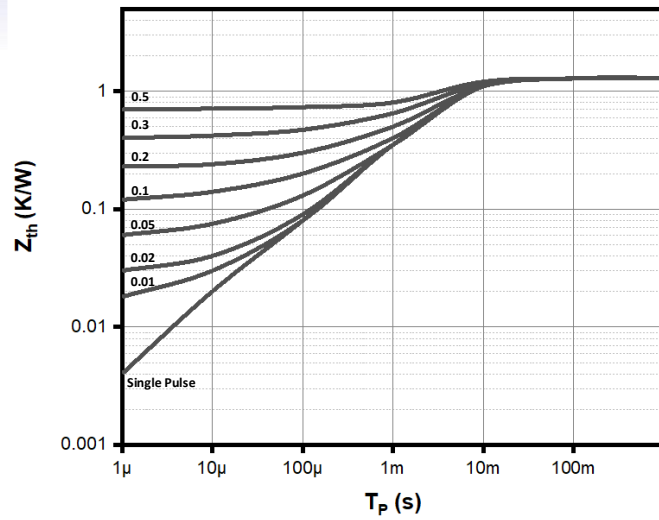

**Fig. 8 Transient Thermal impedance**

**Package TO-247-3 (Unit: mm)**

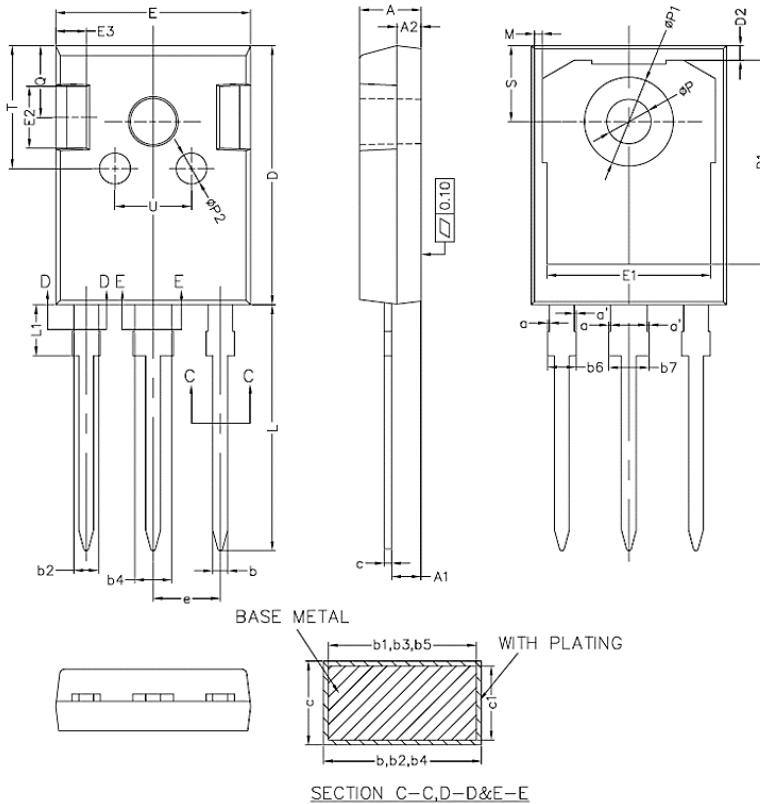

COMMON DIMENSIONS  
(UNITS OF MEASURE=MILLIMETER)

| SYMBOL | MIN   | NOM   | MAX   |
|--------|-------|-------|-------|
| A      | 4.90  | 5.00  | 5.10  |
| A1     | 2.31  | 2.41  | 2.51  |
| A2     | 1.90  | 2.00  | 2.10  |
| a      | 0     | -     | 0.15  |
| a'     | 0     | -     | 0.15  |
| b      | 1.16  | -     | 1.26  |
| b1     | 1.15  | 1.2   | 1.22  |
| b2     | 1.96  | -     | 2.06  |
| b3     | 1.95  | 2.00  | 2.02  |
| b4     | 2.96  | -     | 3.06  |
| b5     | 2.95  | 3.00  | 3.02  |
| b6     | -     | -     | 2.25  |
| b7     | -     | -     | 3.25  |
| c      | 0.59  | -     | 0.66  |
| c1     | 0.58  | 0.60  | 0.62  |
| D      | 20.90 | 21.00 | 21.10 |
| D1     | 16.25 | 16.55 | 16.85 |
| D2     | 1.05  | 1.20  | 1.35  |
| E      | 15.70 | 15.80 | 15.90 |
| E1     | 13.10 | 13.30 | 13.50 |
| E2     | 4.90  | 5.00  | 5.10  |
| E3     | 2.40  | 2.50  | 2.60  |
| e      | 5.34  | 5.44  | 5.54  |
| L      | 19.80 | 19.92 | 20.10 |
| L1     | -     | -     | 4.30  |
| M      | 0.35  | -     | 0.95  |
| P      | 3.50  | 3.60  | 3.70  |
| P1     | 7.00  | -     | 7.40  |
| P2     | 2.40  | 2.50  | 2.60  |
| Q      | 5.60  | -     | 6.00  |
| S      | 6.05  | 6.15  | 6.25  |
| T      | 9.80  | -     | 10.20 |
| U      | 6.00  | -     | 6.40  |

NOTES:  
1. ALL DIMENSIONS REFER TO JEDEC STANDARD TO-247 AD DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
2. EJECTION MARK DEPTH 0.10±0.05

#### **RoHS Compliance**

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC(RoHS2), as implemented January 2<sup>nd</sup>, 2013.

#### **REACH Compliance**

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact an AZ Power representative to ensure you get the most up-to-date REACH SVHC declaration. REACH banned substance information (Reach Article 67) is also available upon request.

This Product has not been designed or tested for use in, and is not intended for use in, applications implanted into the human body nor in applications in which failure of the product could lead to death, personal injury or property damage, including but not limited to equipment used in the operation of nuclear facilities, life-support machines, systems, or air-traffic control systems.

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, AZ Power Inc. disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.



**5601 W SLAUSON AVE 190**  
**CULVER CITY, CA 90230**  
**WWW.AZPE.COM**

Information in this document may change without notice. All referenced product or service names and trademarks are the property of their respective owners. Copyright © 2020 AZ Power Inc. All rights reserved.